

110/127 V - 220/240 V mono-pin fluorescent luminaires for armoured or non-armoured cable **increased safety**




0965 50 Fluo 2 x 58W



0965 88 Fluo 2 x 36W



0965 79 Fluo 2 x 18W

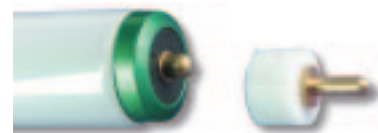

0969 05 Adaptor for Fa8 tube on Fa6 lampholder

18/20, 36/40 and 58/65W fluorescent luminaires

- Ø 38 mm (20, 40 and 65 W) and Ø 26 mm (20, 36 and 58 W) mono-pin tubes with Fa 6 lampholders according to IEC 60061-1
- Power supply via high frequency ballast depending on version : 99 to 140 V 110/127 V ± 10% AC/DC or 220/240 V ~ ± 10%, 198 to 264 V
- Frequency: 50/60 Hz
- Instant start. Power factor ≥ 0.95
- Pre-impregnated fibre glass reinforced polyester body
- Polycarbonate multi-parabolic hinged reflector
- Polycarbonate diffuser hinged to body
- Elastomer gasket
- High temperature internal wiring
- Anti-vibration lampholders with spring system
- Separate operation of the tubes: if one tube fails, the other tube remains lit
- Power supply to the unit cut off by positive safety switch which operates when diffuser is opened, for replacing tubes with mains power switched on
- Open and close using an Allen key or flat screwdriver (system automatically protects against over turning)
- IP 2X terminal strip cover for maintaining the ballast and lampholders without cutting off the main power supply
- Ballast fixed by screws, equipped with a fast connector

Standard version for non-armoured cable

- Three threaded cable entries, 2 at one end and the third at the opposite end for M25 cable gland.
- Supplied with:
 - One M25 polyamide cable gland (sealed Ø: 8 to 18.5 mm)
 - Two M25 blanking plugs
 - One 5 x 4 mm² flexible or 5 x 6mm² rigid connection terminal block maximum.

Tube (W) not supplied	Weight (Kg)	Volume (dm ³)	Cat. No. 110/127 V	Cat. No. 220/240 V	Pack
2 x 18/20	7.54	54.2	0915 79		1
2 x 18/20	5.54	32.3		0965 79	1
2 x 36/40	7.88	54.2	0915 88	0965 88	1
2 x 58/65	9.00	65	0915 50	0965 50	1

Standard version for armoured cable

- Two M20 threaded cable entries with earth continuity plate for armoured cables at one end (cable gland not supplied)
- One clearance hole for M20 cable gland at the opposite end.
- Supplied with :
 - Two blanking plugs and one M20 locknut
 - One 5 x 4 mm² max. flexible or 5 x 6 mm² max. rigid connection terminal block

Tube (W) not supplied	Weight (Kg)	Volume (dm ³)	Cat. No. 110/127 V	Cat. No. 220/240 V	Pack
2 x 18/20	7.54	54.2	0913 67		1
2 x 18/20	5.54	32.3		0963 67	1
2 x 36/40	7.88	54.2	0913 69	0963 69	1
2 x 58/65	9.00	65	0913 82	0963 82	1

Fixing accessories

	Cat. No.	Pack
Set of 2 half clamps for fixing to Ø 49 mm (1" 1/2) or Ø 42 mm (1" 1/4) tube	0965 93	1
For fixing to Ø 60 mm (2") tube :	0965 91	1
Set of 2 zinc-plated steel M8 ring bolts for suspending the unit	0965 94	1
Set of 2 aluminium brackets for fixing on flat surface.	0965 97	1
316 stainless steel version	0965 90	1
Set of 2 aluminium hinged brackets for adjusting direction of luminaire when wall-mounted.	0965 98	1
316 stainless steel version	0965 74	1
Set of 2 zinc-plated steel brackets quick fixing with one hand	0965 96	1
316 stainless steel version	0965 89	1
Fall prevention fixing kit (1.20 m stainless steel chain) for M20 cable entry	0964 06	1
Fall prevention fixing kit (1.20 m stainless steel chain) for M25 cable entry	0964 05	1
Adaptor for Fa8 tube on Fa 6 lampholders	0969 05	1

For special options, please consult us:

- Electronic ballast 254 V 50/60 Hz + 6% - 10%
- Pole mounting and through wiring versions
- Single version (1 x 18 W - 1 x 36 W - 1 x 58 W)
- Special protection of the diffuser against severe chemical attack
- Lens fall prevention fixing kit

Dimensions of fixing accessories (see page 36-37)

Installation and connection method (see page 38-39)

Spare parts (see page 290)

Cable glands for armoured cable (see pages 252-262)