
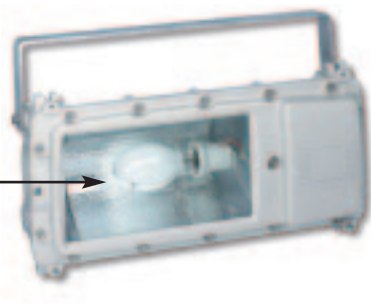


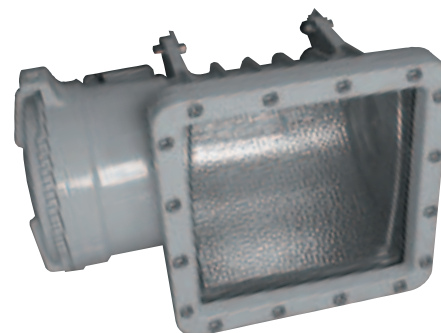
## 230/240 V - 50 Hz IIB floodlights, armoured and non-armoured cable flameproof



Quick access to the lamp





Type 1 - 0951 79 + 0951 93



Type 2 - 0952 76 - 0952 77 - 0952 83

T° rating improved : T4 with 400 W sodium

### 70 to 500/1000 W floodlights

- Compensated power supply 230/240 V ( $\pm 10\%$ ) 50 Hz – Power factor  $\geq 0.9$
- 24 V AC/DC power supply for Cat. No. 0951 65
- Power supply 230 V / 50 Hz (095276/83) - 220 V / 50 Hz (0952 77)
- Grey painted marine grade aluminium alloy body and bezel
- Toughened glass sealed onto frame
- Toughened glass seal onto body (type 2)\*
- Stainless steel fasteners
- Highly polished anodised aluminium internal reflector
- E40 lampholder (except 951 65)
- Adjustable lampholder for changing lighting from narrow to wide beam
- Increased safety terminal box
- Components: ballast, igniter, capacitor separated from the lamp housing, ensuring increased thermal insulation (type 1)\*
- Rapid access to the lamp via threaded cover with safety chain
- Frame has reversible hinge so that it can be pivoted on both sides
- Operates in any position (type 1)\* - except position lamp limiting
- Operates only in position  and  (type 2)\*
- 2 self-tightening connection terminals: capacity: 2 x 6 mm<sup>2</sup> max.
  - 2 earthing terminals capacity 6 mm<sup>2</sup>
  - external earth 4 mm<sup>2</sup>
- Two M20 through wiring cable entries
- Supplied with :
  - One M20 blanking plug and two locknuts
  - One M20 cable gland for non armoured cable (sealed  $\varnothing$  6.5 to 14.5 mm)

### Catalogue numbers

Permissible lamps (not supplied)	Type		Weight (Kg)	Volume (dm <sup>3</sup> )	Cat. No. 230/240 V	Pack.
	(A)	(B)				
150 W HP sodium	x	x	27.3	79.4	<b>0951 66</b>	1
250 W HP sodium	x	x	28.3	79.4	<b>0951 69</b>	1
400 W HP sodium		x	29.8	79.4	<b>0951 79</b>	1
250 W mercury vapour	x	x	27.3	79.4	<b>0951 67</b>	1
400 W mercury vapour		x	27.8	79.4	<b>0951 73</b>	1
250 W metal halide	x	x	28.3	79.4	<b>0951 68</b>	1
400 W metal halide		x	29.8	79.4	<b>0951 77</b>	1
500 W / 1000 W halogen		x	24.3	79.4	<b>0951 84</b>	1
2 x 70 W halogen H3 24 V (C)			25.3	79.4	0951 65	1

(A) Ovoid - (B) Tubular - (C) Lamps supplied







\* Type 1 : cat no. 0951 65/66/67/68/69/73/77/79/84

\* Type 2 : cat no. 0952 76/77/83

### Catalogue numbers

Permissible lamps (not supplied)	Type		Weight (Kg)	Volume (dm <sup>3</sup> )	Cat. No. 220 V	Cat. No. 230/240 V	Pack.
	(1)	(2)					
250 W sodium	x	x	35,5	104,4		<b>0952 76</b>	1
400 W sodium	x	x	35,5	104,4	<b>0952 77</b>		1
500 W / 1000 W halogen	x	x	32	104,4		<b>0952 83</b>	1

### Accessories

	Cat. No.	Pack
Galvanised steel hinged bracket for For 0951 65/66/67/68/69/73/77/79/84 For 0952 76/77/83	 0951 93	1
Set of 2 galvanised steel clamp brackets for: - Fixing on 1" 1/4 ( $\varnothing$ 42 mm) or 1" 1/2 ( $\varnothing$ 49 mm) tube - Fixing on 2" ( $\varnothing$ 60) tube	 0951 98	1
For 0951 65/66/67/68/69/73/77/79/84	0951 90	1
Clip-on overhead diffuser (1) (galvanised steel, black painting)	 0951 91	1
For 0951 65/66/67/68/69/73/77/79/84	0951 91	1
Clip-on protective guard (1) (zinc plated steel)	 0951 95	1
For 0951 65/66/67/68/69/73/77/79/84	0951 95	1
Set of horizontal fixings (galvanised steel) For 0951 65/66/67/68/69/73/77/79/84 For 0952 76/77/83	 0951 97	1
For 0951 65/66/67/68/69/73/77/79/84	0951 97	1
Fixing on tube 1" 1/4 ( $\varnothing$ 42 mm) or 1" 1/2 ( $\varnothing$ 49mm) (galvanised steel) For 0951 65/66/67/68/69/73/77/79/84 For 0952 76/77/83	 0952 84	1
For 0951 65/66/67/68/69/73/77/79/84	0952 84	1
Fixing on tube 2" (60 mm) (galvanised steel) For 0951 65/66/67/68/69/73/77/79/84 For 0952 76/77/83	 0952 86	1
For 0951 65/66/67/68/69/73/77/79/84	0952 86	1
400 W mercury vapour cylindrical lamps	0948 95	1

(1) These 2 accessories cannot be fitted together

### For special options, please consult us:

- 110/127 V 50/60 Hz - 208 V - 254 V, 50 Hz ...
- 2 additional terminals for 3-phase + neutral  
380/415 V loop in loop out (connection possible)

Type 2 (IIC consult us)

Spare parts (see page 290)

Cable gland for armoured cable (see page 252-262)