


Plugs and Receptacles

The Appleton catalogue contains a complete range of sockets and plugs certified to North American standards (NEC and CEC), designed for industrial applications as well as installations in potentially explosive atmospheres.

For more information, contact your local representative or visit the website: www.appletonelec.com

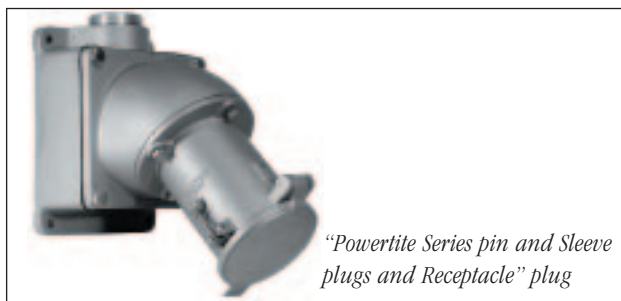

"Powertite Series pin and Sleeve plug and Receptacle" plug

- Conformity with standards  and CSA

Certification:

NEMA 4X (30, 60, 100, 200 A)

Materials:

- Socket: Painted aluminium
- Insulation: Reinforced fibreglass polyester
- Contacts: Copper or brass

Electrical characteristics:

- Current: 30-400 A
- Voltage: Up to 600 V
- Frequency: 50-400 Hz
- Single-phase or three-phase


Technical characteristics:

- The plugs are equipped with connectors with a wide clamping range
- The plugs can also be mounted on sockets intended for use in hazardous areas

For further information, refer to section D in the Appleton catalogue



"U-Line series Switched Plug and Receptacle" plug

- Conformity with standards 

Certification:

Class I, Div. 1 & 2, Groups B, C & D

Class II, Div. 1 & 2, Groups F & G

Class III

NEMA 3, 3R, 7BCD, 9F

Materials:

- Socket: Painted aluminium
- Insulation: Reinforced fibreglass polyester

Electrical characteristics:

- 125 V, 15 A (NEMA 5-15R)
- 125 V, 20 A (NEMA 5-20R)
- 250 V, 20 A (NEMA 6-20R)
- 1 horsepower
- Single-phase + earth

Technical characteristics:

- Switched on by rotating the plug
- Impossible to remove the plug with the power on
- Available with RCBO

For further information, refer to section L in the Appleton catalogue