



0939 03
Selector switch



0940 01
Padlockable handle

Mounting on the cover or back of box

- Mounting in flameproof boxes (drill holes M22 x 1.5 ISO) on rail at back of box or on the cover (except for box Cat. No. 0931 51: at back of box only)
- Connection : 2 x 4 mm²
- Supplied with shaft tube, non-padlockable handle, fixing support at back of box, adaptor for fixing on the cover and blank yellow label for marking (60 x 50 mm)

Switches - 400 V~

	Weight (Kg)	Volume (dm ³)	Cat. No. Cover	Pack
10 A single pole	0.3	0.5	0940 64	1
10 A double pole	0.3	0.5	0940 65	1
16 A 4-pole	0.3	0.5	0940 66	1

16 A changeover switches - 400 V~

Single pole 1-2	0.3	0.9	0939 03	1
Single pole with stop 1-0-2	0.3	0.9	0939 04	1

Accessories

For switch or selector switch

	Weight (Kg)	Volume (dm ³)	Cat. No.	Pack
Non-padlockable handle	0.02	0.04	0940 00	1
Padlockable handle (3 padlocks) with 48 x 48 mm faceplate	0.06	0.3	0940 01	5
Blanking plug	0.02	0.2	0940 98	5

Zones 1 & 2 - 21 & 22	ATEX	IEC	II 2 G/D
EEx d IIC	IP66	IK10	

TECHNICAL DATA

Zones :

- 1 and 2 and 21 - 22

Classification :

- According to CENELEC :
 - Conforming to ATEX Directive 94/9 EC and standards EN 50014-18
 - 0081 II 2 G EEx d IIC for gas
 - 0081 II 2 D for dust
- According to IEC :
 - Conforming to standards IEC 60079-0/1 Ex d IIC

Certification :

- Approved type TCD
- CENELEC LCIE 02 ATEX 0036U
- IEC LCIE Ex 02 026 U
- Declaration of conformity No. 5C213 for components
- Conforming to standards EN 50281-1-1 and IEC 61241-1-1 "combustible dust"

Protection index :


- IP66 according to EN 60529 and IEC 60529
- IK10 mechanical resistance according to EN 50102

Operating temperature :

- 40°C to + 55°C


Anticorrosion treatment and climate protection : see page G50

Dimensions (mm) :

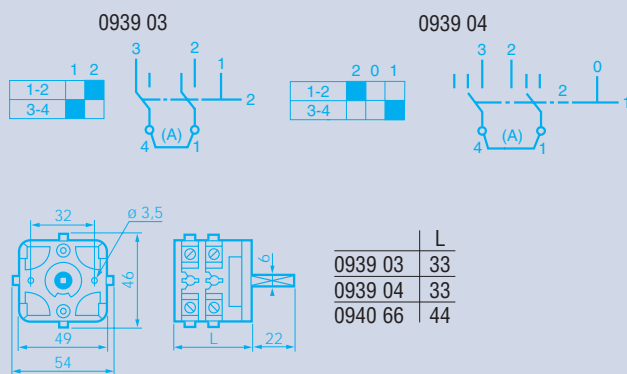


Mounting at back of box

Mounting on the cover

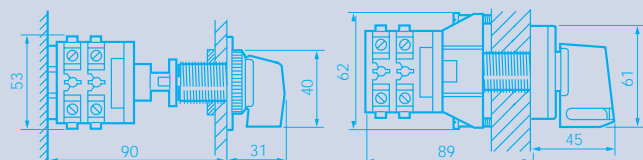

Blanking plug



0940 98

Data sheet available on request