



Connections

The Appleton catalogue contains a complete range of connectors, cable entries and metal pipes, certified to North American standards (NEC and CEC), designed for industrial applications as well as installations in potentially explosive atmospheres.

For more information, contact your local representative or visit the website : www.appletonelec.com

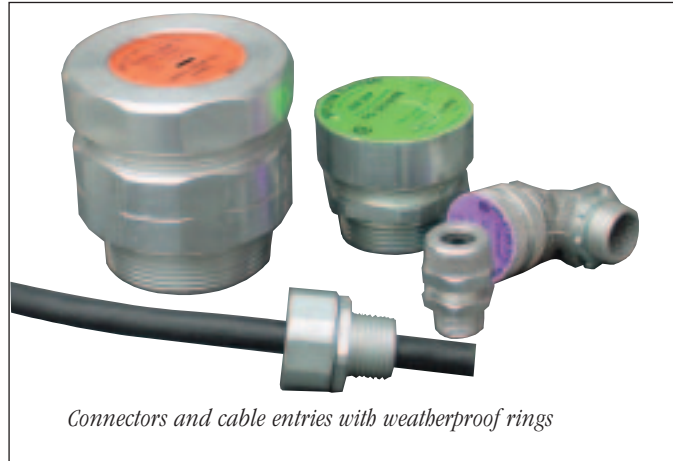

- Conformity with standards 

Certification:

Class I, Div. 2 conforming to standard NEC 501.4(B)

Class II, Div. 1 and 2 conforming to standard NEC 501.4(A) & (B)

Class III, Div. 1 and 2 conforming to standard NEC 503.3(A) & (B)

Materials:

- Body : Aluminium or steel

- Sealing ring: Neoprene

Technical characteristics:


- For cables with external flexible gaskets in neoprene, hypalon and PVC

- 1/2" NPT to 4" NPT thread

- External cable diameter : From 0.06" to 4"

- Straight or 90° elbow connectors

For further information, please refer to section CC of the Appleton catalogue.

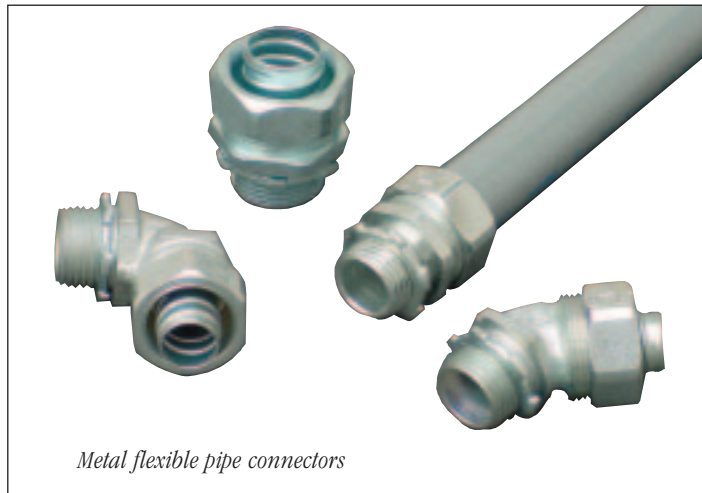

- Conformity with standards 

Certification:

Class I, Div. 2 conforming to standard NEC 501.4(B)

Class II, Div. 1 and 2 conforming to standard NEC 501.4(A) & (B)

Class III, Div. 1 and 2 conforming to standard NEC 503.3(A) & (B)

Materials:

- Painted, zinc-plated, bichromate steel

- Painted aluminium

Electrical characteristics:

- High tension resistance

- Available with NPT, PG or ISO threads

- Straight, 45° or 90° elbow connectors

- Sealed against oil, water, dust and vapours

For further information, please refer to section ST of the Appleton catalogue.